

Features:

- Constant voltage/ PWM Output
- Leading & Trailing edge dimmable
- AC input: 200-240VAC
- Built-in active PFC function
- Efficiency up to 87%
- Protections: Short circuit/ Over loading/Over current/ Over temperature
- Full protection aluminium housing
- Cooling by free air convection
- Suitable for LED lighting and moving signs
- 5 years warranty



UK
CA



SELV IP66



Models

ELED-200P-12T

ELED-200P-24T

ELED-200P-48T

Output Specifications

Output Voltage	12V	24V	48V
Voltage Tolerance		±0.5V	
Output Current	16.6A	8.3A	4.16A
Rated Power		200W	

Input Specifications

Input Voltage	200-240VAC		
Frequency Range	47-63Hz		
Inrush Current	55A (Twidth=220μs 230VAC)		
Full Load Efficiency (Typ.)	86%		87%
AC Current (Max.)		1.4A	
Leakage Current	<0.50mA		
Power Factor	PF>0.97/200VAC PF>0.97/230VAC PF>0.97/240VAC (Full Loading)		

Protection

Short Circuit	Shut down o/p voltage, re-power on to recover after fault condition is removed
Over Loading	≤120%, shut down o/p voltage, re-power on to recover
Over Temperature	100°C± 10°C shut down o/p voltage, re-power on to recover

Environment

Working Temperature	-40~+60°C (Refer to derating curve)
Working Humidity	20-95% RH, non-condensing
Storage Temperature, Humidity	-40~+80°C, 10-95% RH
Temperature Coefficient	±0.03%/°C (0-40°C)

Environment

Vibration 10-500Hz, 5G 12min./ 1 cycle, period for 72min.each along X, Y, Z axes

Safety & EMC

Safety standards EN61347-1, EN61347-2-13

Withstand Voltage I/P-O/P:3.75KVAC I/P-FG:1.88KVAC O/P-FG:0.5KVAC

Isolation Resistance I/P-O/P I/P-FG O/P-FG: 100MΩ/500VDC/25°C/70%RH

EMC Emission Compliance to EN55015, EN61000-3-2, 3 (>60%load)

EMC Immunity EN61000-4-2,3,4,5,6,11, EN61547


Other Specifications

Weight 1.45 kg


Size 265 x 78 x 47 mm

Packing 265 x 83 x 65 mm (inner box), 340 x 280 x 185 mm (10PCS/CTN)


Mechanical Specifications

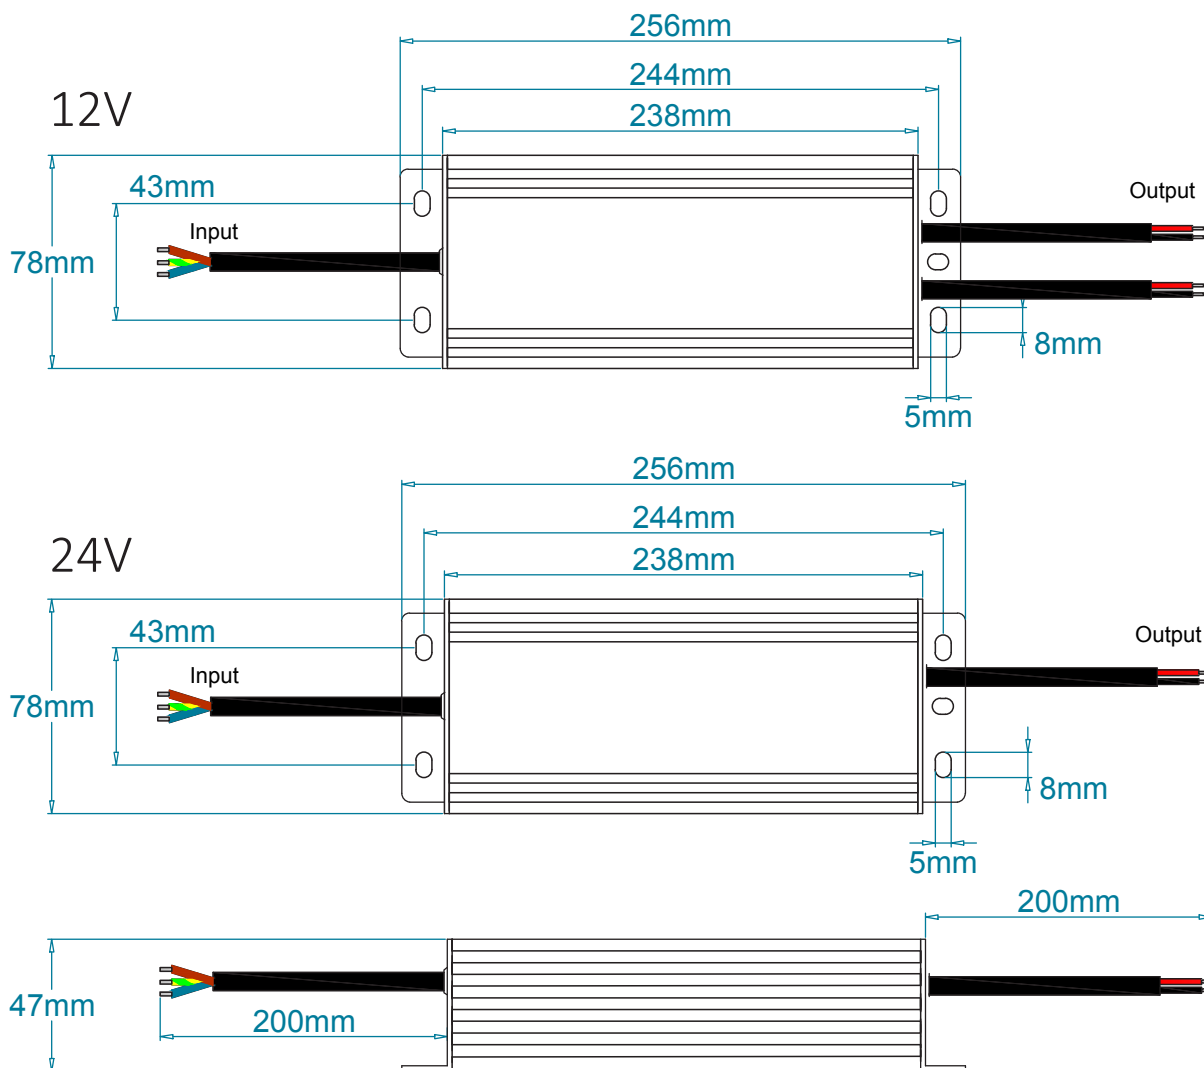

Derating Curve

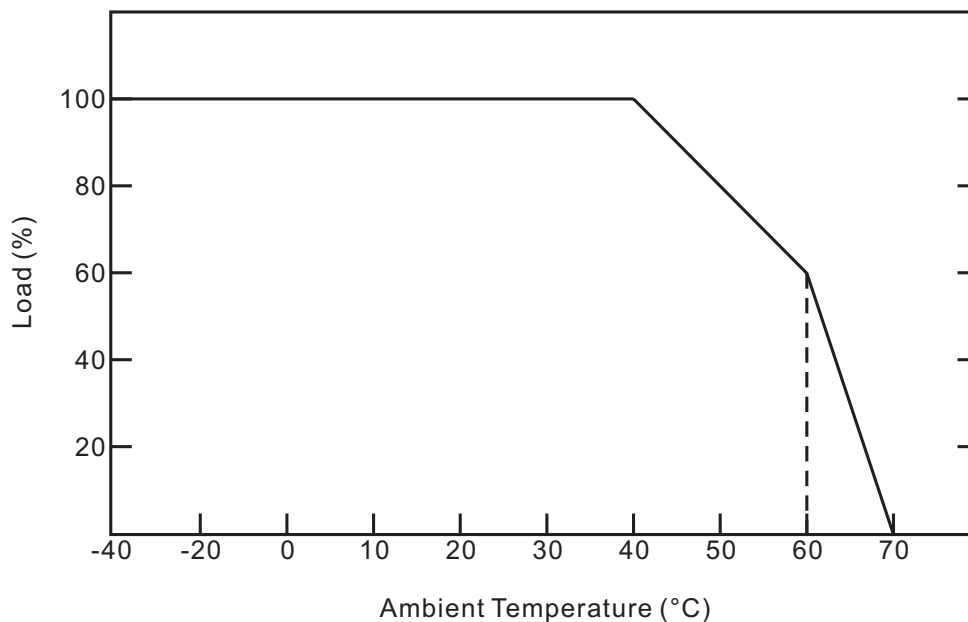

Connecting Diagram

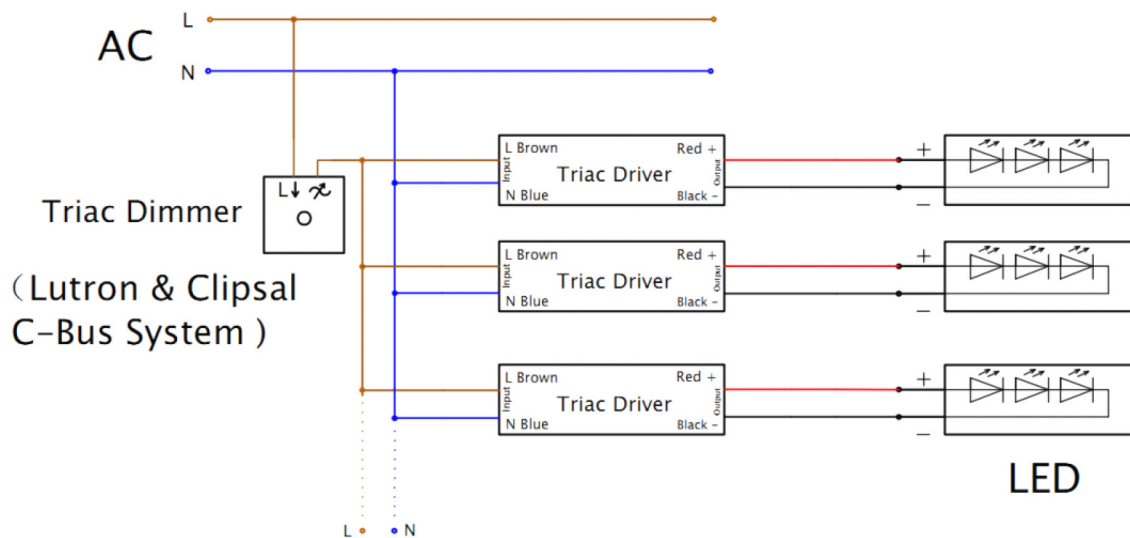

Connecting Diagram

